


**60V/5A N-Channel Advanced Power MOSFET****Features**

- Advanced Trench Technology
- Excellent RDS(ON) and Low Gate Charge
- Lead free product is acquired

Applications

- Low Switch
- PWM Application
- Power management

BVDSS	60	V
ID	5	A
RDSON@VGS=10V	26	mΩ
RDSON@VGS=4.5V	31	mΩ

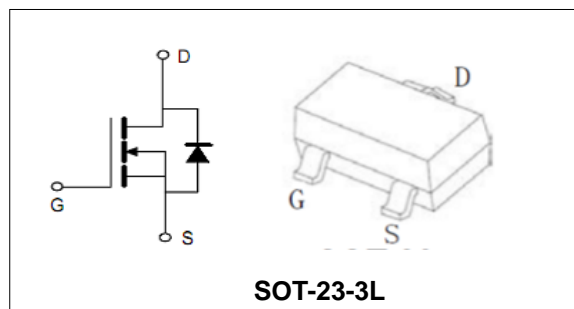**Order Information**

Product	Package	Marking	Reel Size	Reel	Carton
PTL6205	SOT-23-3L	6205	7inch	3000PCS	180000PCS

Absolute Maximum Ratings

Symbol	Parameter	Rating	Unit
Common Ratings (TC=25°C Unless Otherwise Noted)			
$V_{(BR)DSS}$	Drain-Source Voltage	60	V
V_{GS}	Gate-Source Voltage	±20	V
T_J	Maximum Junction Temperature	150	°C
T_{STG}	Storage Temperature Range	-55 to 150	°C
I_S	Diode Continuous Forward Current	$T_A = 25^\circ\text{C}$ 5	A
Mounted on Large Heat Sink			
I_{DM}	Pulse Drain Current (Silicon Limit) (Note1)	$T_A = 25^\circ\text{C}$ 20	A
I_D	Continuous Drain current	$T_A = 25^\circ\text{C}$ 5	A
P_D	Maximum Power Dissipation	$T_A = 25^\circ\text{C}$ 2	W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient (Note2)	62.5	°C/W



60V/5A N-Channel Advanced Power MOSFET

Symbol	Parameter	Condition	Min.	Typ.	Max.	Unit
Static Electrical Characteristics @ T_J = 25°C (unless otherwise stated)						
V _{(BR)DSS}	Drain- Source Breakdown Voltage	VGS=0V ID=250μA	60	--	--	V
I _{DSS}	Zero Gate Voltage Drain current	VDS=60V,VGS=0V	--	--	1	μA
I _{GSS}	Gate-Body Leakage Current	VGS=±20V,VDS=0V	--	--	±100	nA
V _{GS(TH)}	Gate Threshold Voltage	VDS=VGS,ID=250μA	1	1.5	2.5	V
R _{DS(ON)}	Drain-Source On-State Resistance (Note3)	VGS=10V, ID=5A	--	26	35	mΩ
		VGS=4.5V, ID=4A	--	31	49	mΩ
Dynamic Electrical Characteristics @ T_J = 25°C (unless otherwise stated) (Note4)						
C _{iss}	Input Capacitance	VDS= 25V, VGS=0V, F=1MHz	--	1148	--	pF
C _{oss}	Output Capacitance		--	58.5	--	pF
C _{rss}	Reverse Transfer Capacitance		--	49.4	--	pF
Q _g	Total Gate Charge	VDS= 30V, ID=2.5A, VGS= 10V	--	20.3	--	nC
Q _{gs}	Gate-Source Charge		--	3.7	--	nC
Q _{gd}	Gate-Drain Charge		--	5.3	--	nC
Switching Characteristics (Note4)						
t _{d(on)}	Turn-on Delay Time	VDD=30V, ID=5A, RG=1.8Ω, VGS=10V	--	7.6	--	nS
t _r	Turn-on Rise Time		--	20	--	nS
t _{d(off)}	Turn-off Delay Time		--	15	--	nS
t _f	Turn-off Fall Time		--	24	--	nS
Source- Drain Diode Characteristics @ T_J = 25°C (unless otherwise stated)						
V _{SD}	Forward on voltage (Note3)	IS=5A,VGS=0V	--	--	1.2	V

Note:

1. Repetitive Rating: Pulse width limited by maximum junction temperature.
2. Surface Mounted on FR4 Board, t ≤ 10 sec
3. Pulse Test: pulse width ≤ 300 us, duty cycle ≤ 2%.
4. Guaranteed by design, not subject to production testing.



60V/5A N-Channel Advanced Power MOSFET

Typical Characteristics

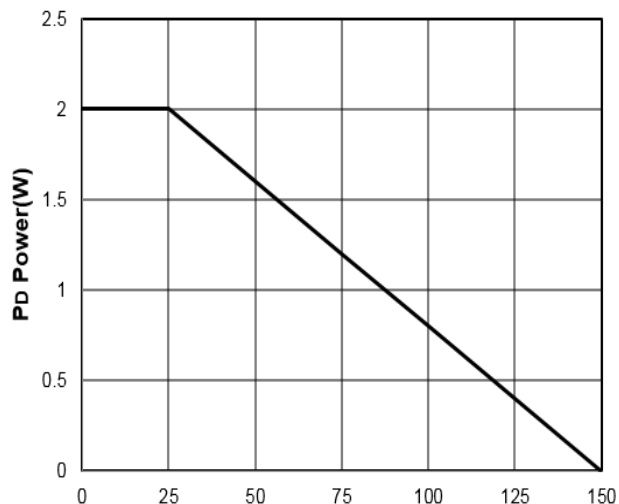


Figure1: Tj Junction Temperature (°C)

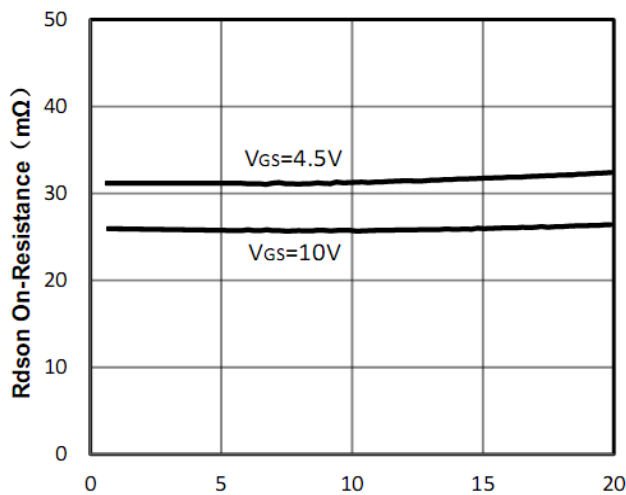


Figure2: Id Drain Current (A)

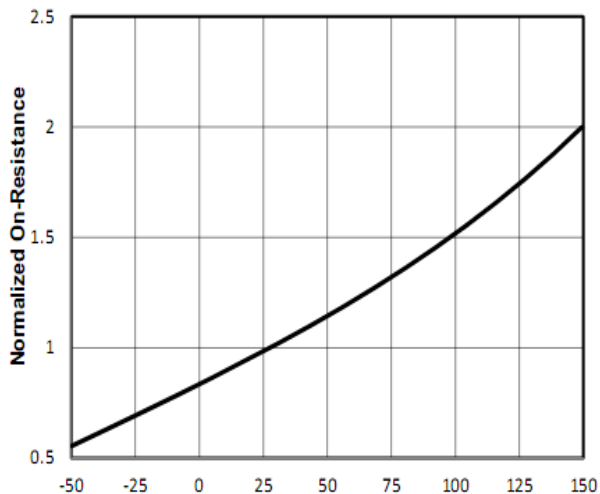


Figure3: Tj Junction Temperature (°C)

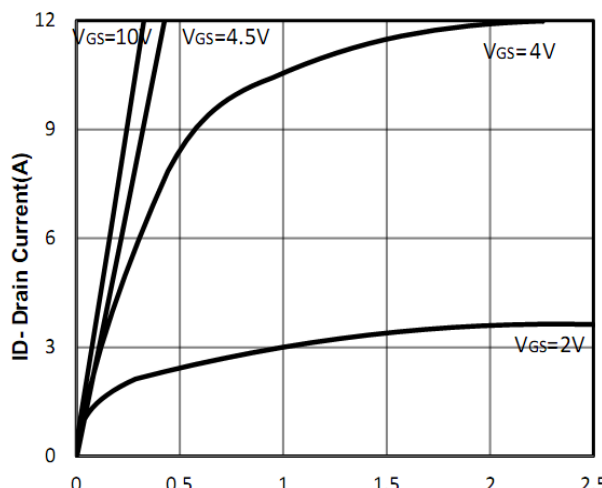


Figure4: Vds Drain-Source Voltage (V)

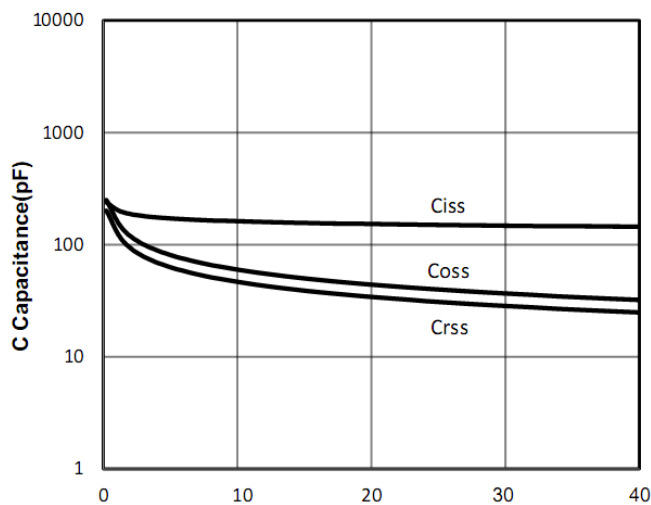


Figure5: Vds Drain-Source Voltage (V)

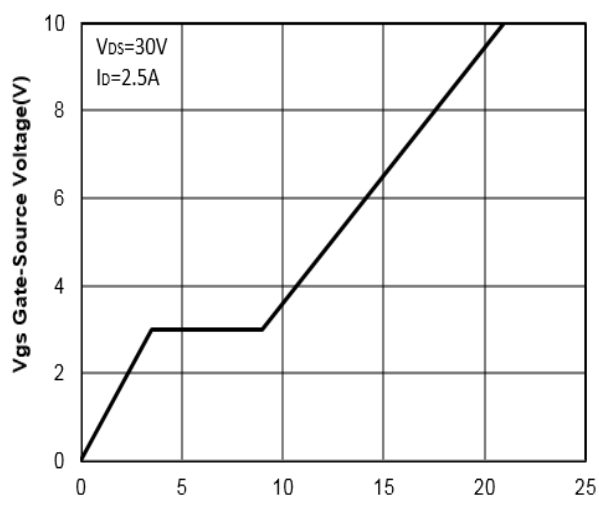


Figure6: Qg Gate Charge (nC)

60V/5A N-Channel Advanced Power MOSFET

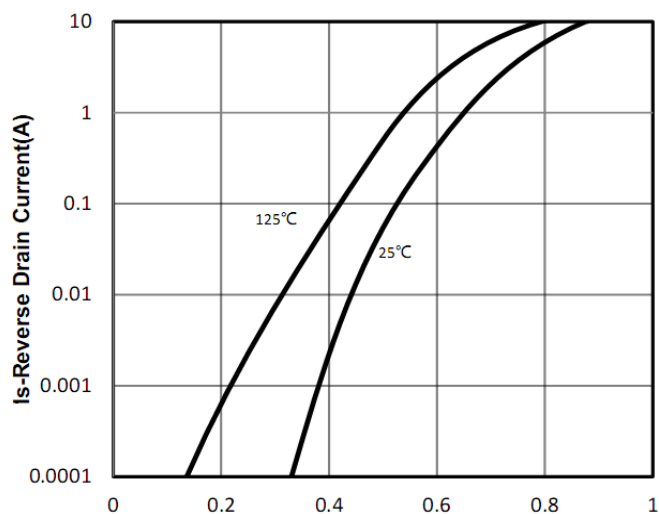


Figure7: Vsd Source-Drain Voltage (V)

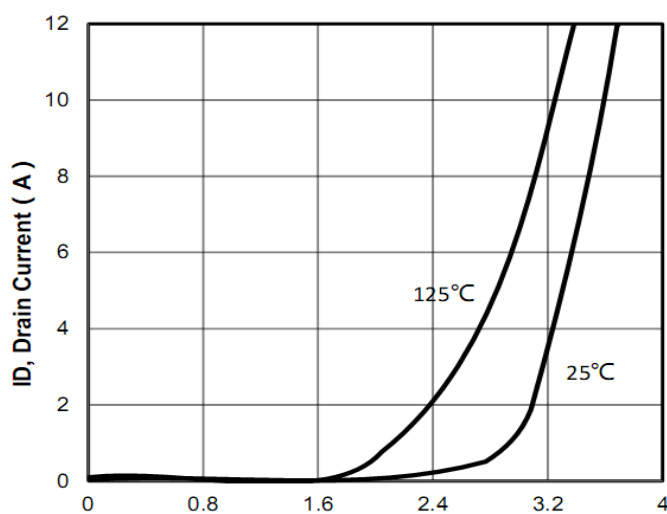


Figure8: Vgs Gate-Source Voltage (V)

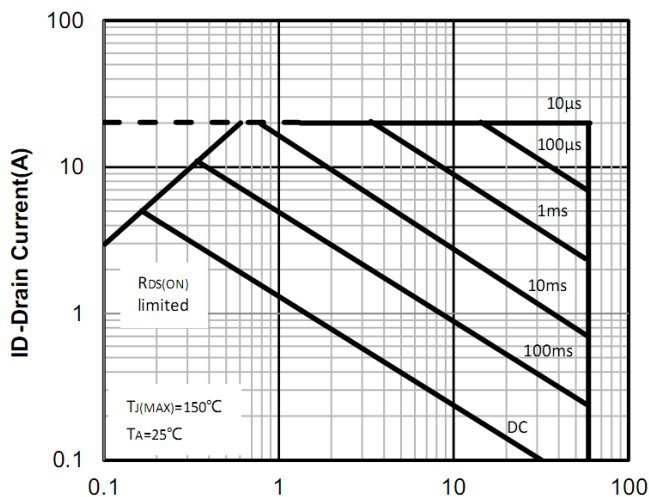


Figure9: Vds Drain -Source Voltage (V)

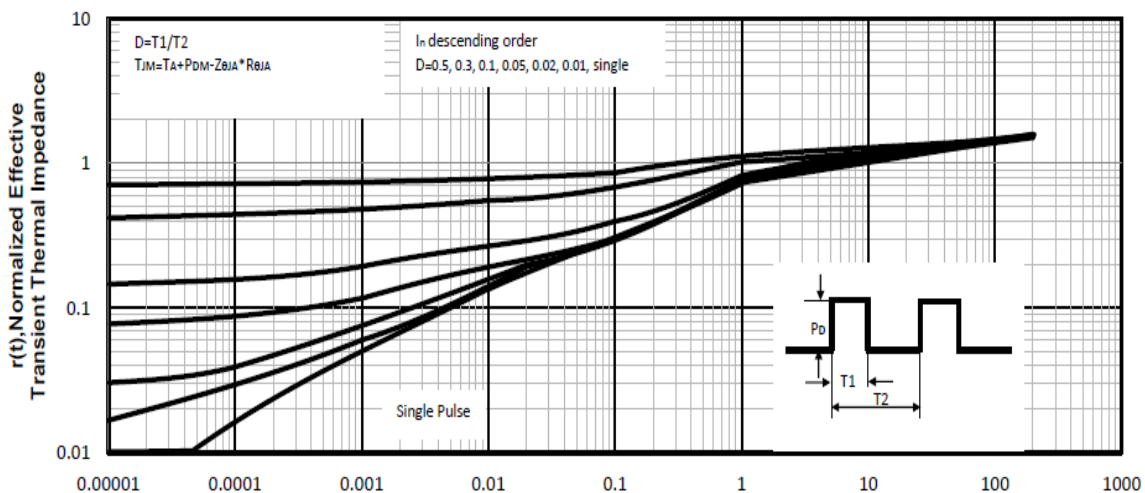
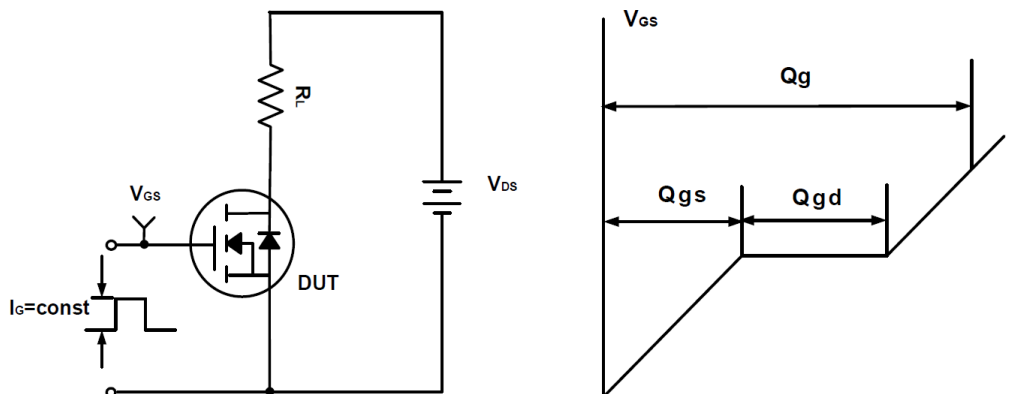
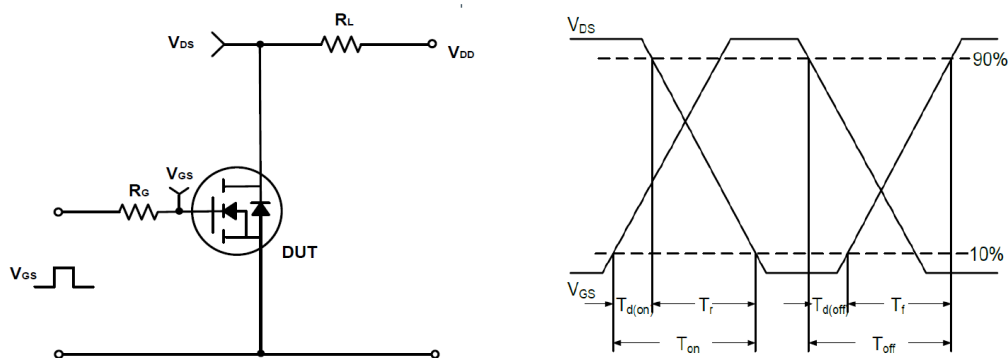
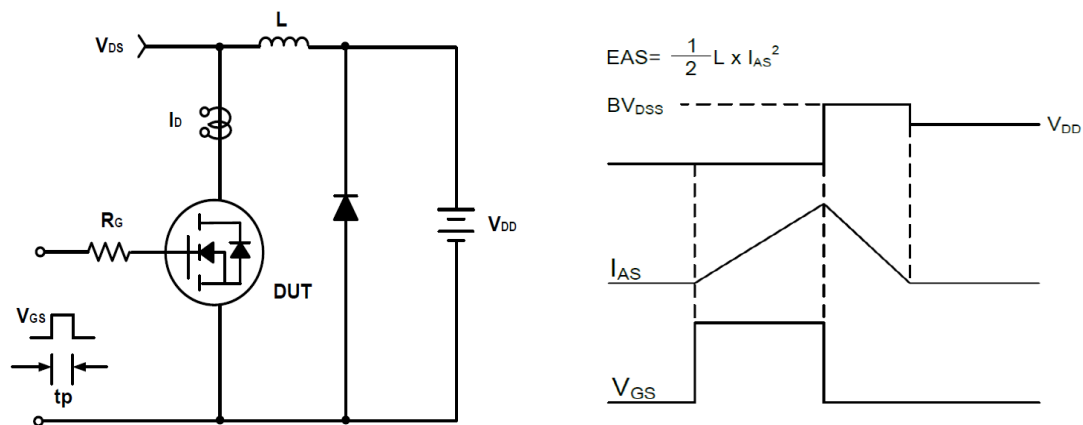
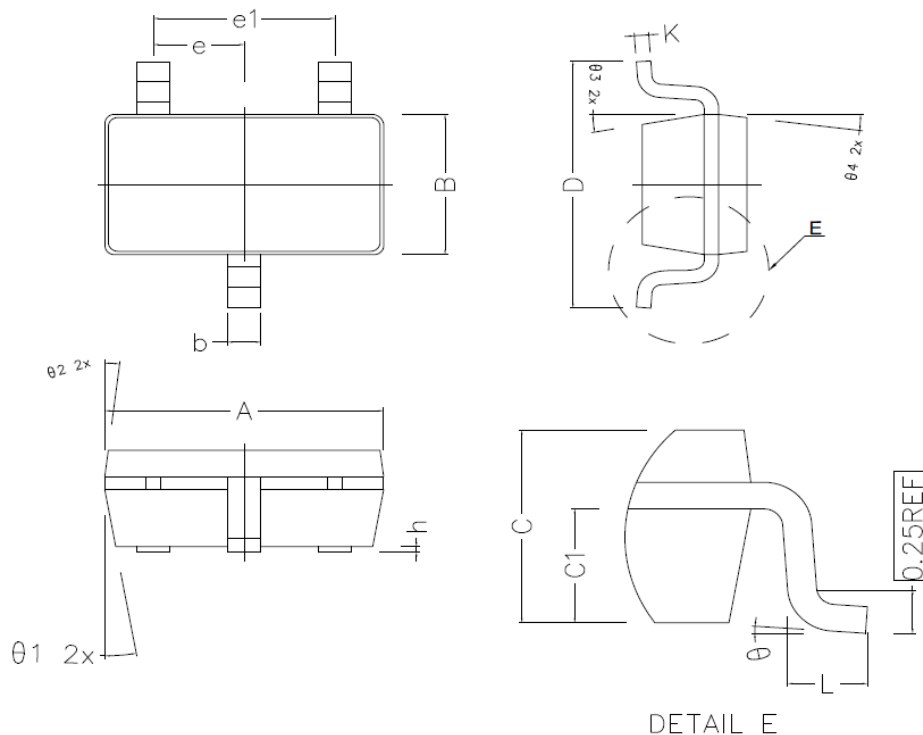


Figure10: Square Wave Pulse Duration (sec)

Test Circuit and Waveform:

Figure A Gate Charge Test Circuit & Waveforms

Figure B Switching Test Circuit & Waveforms

Figure C Unclamped Inductive Switching Circuit & Waveforms

60V/5A N-Channel Advanced Power MOSFET
SOT-23-3 Package Outline Dimensions (Units: mm)


COMMON DIMENSIONS (UNITS OF MEASURE IS mm)			
	MIN	NORMAL	MAX
A	2.820	2.920	3.020
B	1.500	1.600	1.700
C	1.050	1.100	1.150
C1	0.600	0.650	0.700
D	2.650	2.800	2.950
L	0.300	0.450	0.600
b	0.280	0.350	0.420
h	0.020	0.050	0.100
K	0.120	—	0.230
e	0.950TYPE		
e1	1.900TYPE		
θ ₁	10° TYPE		
θ ₂	7° TYPE		
θ ₃	10° TYPE		
θ ₄	7° TYPE		
θ	0° ~ 8°		